


## DS-D4450FO-CKI Outdoor Fixed LED Displays



- Widely applied in outdoor permanent advertising scenes
- Thin and light cabinet with the die-casting aluminum design
- IP 65 rating for front and IP54 rating for back
- Free of air conditioners with multiple ventilation modes working together inside the cabinets
- Standing, wall mount, and lifting available for installation
- Customizable as stadium LED screens




## ▪ Specification

	Model	DS-D4450FO-CKI
<b>Cabinet</b>	Pixel Configuration	1R1G1B
	Pixel Pitch Category	P5.0
	Pixel Pitch	5.0 mm
	Modules Component	3 × 6
	Dimensions (W × H × D)	960 mm × 960 mm × 138 mm (37.80" × 37.80" × 5.43")
	Resolution	192 × 192
	Area	0.9216 m <sup>2</sup>
	Weight	50 kg (110.23 lb.)
	Pixel Density	40000 dots/m <sup>2</sup>
	Lamp Board Housing	With housing
	Cabinet Material	Waterproof sheet metal box
	Maintenance Method	Back maintenance
	Cabinet Flatness	0.2 mm
	Protection Level	IP65 front and IP54 back
<b>Key Material</b>	Lamp Encapsulation	HG 1921
	Control System	DS-D42C04-N、DS-D42C06-N
<b>Display</b>	White Balance Brightness	4500 nits
	Color Temperature	3500K to 9300K adjustable
	Viewing Angle	Horizontal 140°, vertical 120°
	Contrast Ratio	≥ 5000:1
	Color Uniformity	≤ ± 0.003Cx, Cy
	Brightness Uniformity	≥ 97%
<b>Processing Performance</b>	Driving Method	Constant current driving
	Frame Frequency	60 Hz
	Refresh Rate	Up to 3840 Hz
	Grey Level	Up to 14 bit
	Display Color	16777216
<b>Power</b>	Power Supply	110~220 VAC ± 15%
	Max. Consumption	≤ 1000 W/m <sup>2</sup>
	Average Consumption	< 300 W/m <sup>2</sup>
<b>Working Environment</b>	Working Temperature	-20 °C to 50 °C (-4 °F to 120 °F)
	Working Humidity	10%~80%RH
	Storage Humidity	10%~85%RH
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
<b>General</b>	Gross Weight	270 kg /5 in 1 (595.25 lb.)
	Package Dimension (W × H × D)	1370 mm × 1090 mm × 1180 mm (53.93" × 43.91" × 46.46")
	Lifespan	Lamp 100,000 hours


▪ Available Model

DS-D4450FO-CKI

▪ Dimension

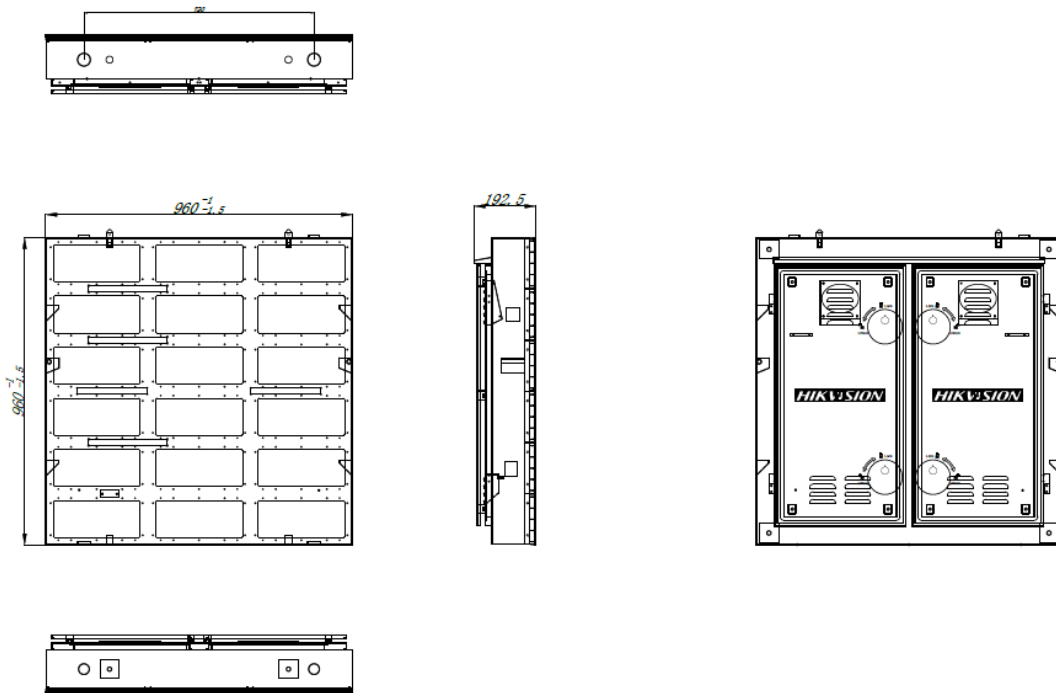

Distributed by

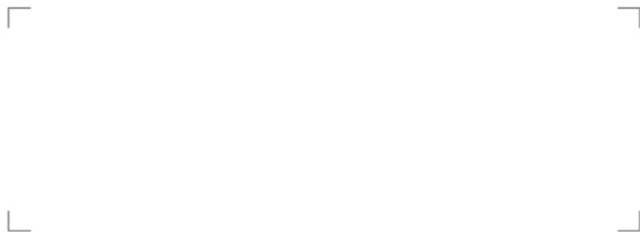**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com