

## DS-DT60V-03HDI20NO/U LED Controller



DS-DT60V-03HDI20NO/U LED controller is used with the full-color LED display. It provides seamless splicing display of large screens of any size. It is suitable for multiple occasions, such as conference rooms, studios, stadiums, airport stations, banks, advertisements, and home cinemas.

- Provides a full-color OLED non-touch screen with the resolution of 128 × 64. Thus, you can view device status at any time and the device maintenance become easier.
- Adopts the 1 U rackmount chassis and industrial grade chassis system.
- Provides buttons on the front panel to change brightness and other parameters.
- Provides indicators on the front panel to indicate the power status, signal access status, and running status.
- Supports 3 channels of video signal input. The HDMI 2.0 resolution is 4096 × 2160@60 Hz. The DVI and HDMI 1.4 resolution is 1920 × 1200@60 Hz.
- Supports frame rate self-adaption ranging from 25 Hz to 60 Hz for image collection.
- Supports the RGB and YUV 444 image loading output without image quality loss.
- Supports 20 channels of loading output with the maximum loading capacity of 13 MP. The maximum width is 8192 pixels and maximum height is 8192 pixels for a single device and the maximum loading capacity of each network port is 0.65 MP.
- Supports input of mixed HDMI audio and video stream, and 3.5 mm audio output.
- Supports full-screen zoom and custom zoom for video signal input, custom changing, and custom splicing.
- Supports opening the signal source windows on the display and roaming window.
- Supports 1 channel of subtitle. You can set the color, font, and scrolling speed for the subtitle and add the picture.
- Supports the video wall configuration and window visualization.
- Supports up to 10 scenes. Thus, the saved scene can be used directly in the future.
- Supports displaying 7 windows (3 signal source windows + 2 image windows + 1 scrolling text window + 1 background window) and customizing the window layout for all windows except for the background window.
- Supports cascading management and unified control of multiple LED controllers through the network.
- Supports high-bandwidth digital content protection technology of HDCP 2.2 protocol.
- Supports custom EDID settings.
- Supports hot backup.
- Supports custom cable alignment without rectangular frame limit.
- Supports the operation through the client or the LED controller web page.
- Supports configuring the background.
- Supports configuring the startup logo and screen saver.
- Supports configuring the screen dehumidification.
- Supports using the remote control to control the screen to display the remote UI menu.

- Provides buttons on the front panel to change brightness and other parameters
- Supporting adjusting the brightness, contrast, hue, and other parameters of the output image.
- Supports pixel-level screen correction to effectively eliminate color difference and improve the quality of the display.
- Supports changing the display mode, including general, text, advertisement, video, cinema, security, and etc.
- Supports selecting the color temperature adjustment mode such as standard, warm color, and cold color and customizing color temperature.
- Supports eye protection mode to protect the vision of the viewer.
- Supports high refresh rate output at 3840 Hz, nanosecond response time, and smooth video picture.
- Supports viewing the loading relationship between the device and LED screen.
- Supports viewing abnormal screen positioning during running.
- Supports checking parameters such as device running status, device memory, CPU usage, device running temperature, and network port usage.
- Supports abnormal screen voltage detection, screen temperature detection, and device temperature detection.
- Supports connecting to the central control device and IoT device through RS-485 port.
- Supports docking device command and managing device by using the control network port and the protocols such as SDK and OTAP.
- Supports using the control network port to connect to the multi-function card to realize environment temperature detection, environment humidity detection, and the cooperation between the human body temperature monitoring and screen control.
- Supports HDMI 2.0 and DVI loop output. The maximum HDMI loop output is 4096 × 2160@60 Hz and the maximum DVI loop output is 1920 × 1200@60 Hz.


## ▪ Specification

<b>Product Model</b>	
Product Model	DS-DT60V-03HDI20NO/U
<b>Processing Performance</b>	
Brightness Control	1 to 100 tunable (level-by-level white balance)
Frame Frequency	25 Hz to 60 Hz
Grey Level	256
Display Color	16 MP
Processing Depth	8 bit
Image Scaling	Supported
<b>Chassis</b>	
Chassis Height	1 U
Chassis Width	440 mm (17.32 inch)
<b>Product Type</b>	
Product Type	LED controller
<b>LED Controller Power</b>	
Average Consumption	≤43W
Number of power interfaces	1
Power interface specifications	100 to240 VAC, 50/60 Hz
<b>Video Wall</b>	
Open Windows	3 signal source windows + 2 image windows + 1 scrolling text window + 1 background window
Layers per Device	7
Scenes	10
Background Images	2
Background Resolution	Min.: 640 × 480, Max.: 1920 × 1200
Background Format	JGP/JPEG
Subtitles	1
Subtitle Width	32760
Subtitle Font	Supports Xiaomi font and custom font
<b>General</b>	
Working Temperature	-10°C to 50°C
Storage Humidity	10% to 90%
Working Humidity	10% to 90%
Storage Temperature	-10°C to 50°C
Packaging Size (W × H × D)	589 mm × 103 mm × 410 mm (23.19 inch × 4.06 inch × 16.14 inch)
Net Weight	3.30 kg (7.28 lb.)
Gross Weight	4.50kg (9.92 lb.)
Dimensions (W × H × D)	440 mm × 44.5 mm × 320.8 mm (17.32 inch × 1.75 inch × 12.63 inch)
Packing List	1 × AC power cord, 1 pair of mounting brackets, 2 × RS-485 green Phoenix contact for central control device, 1 × regulatory compliance and safety information manual, 1 pair of rubber feet
<b>Audio Input</b>	
Audio Input Interfaces	2
Audio Input Interface Type	1 channel of HDMI input with embedded audio + 1 channel of HDMI in-band audio
<b>Video Input</b>	
Video Input Interfaces	3

Video Input Interface Type	1 channel of HDMI2.0 + 1 channel of HDMI1.4 + 1 channel of DVI
Max. Video Input Resolution	HDMI 2.0:4K; HDMI 1.4: 1080p; DVI: 1080p
Video Input Resolution	<p>HDMI 2.0 port:  Max. resolution: 4096 × 2160@60 Hz  Min. resolution: 320 × 180@60 Hz  Supports custom resolution. Total resolution should be no more than 8.84 MP@60 Hz  Max. width: 144 to 8192, alignment: 2 alignment  Max. height: 144 to 8192, alignment: 1 alignment  Supports HDCP 2.2  Interlacing signal input is not supported.</p> <p>HDMI 1.4 port:  Max. resolution: 1920 × 1200@60 Hz  Min. resolution: 320 × 180@60 Hz  Supports custom resolution. Total resolution should be no more than 2.6 MP@60 Hz  Max. width: 144 to 4096, alignment: 2 alignment  Max. height: 144 to 4096, alignment: 1 alignment  Supports HDCP 1.4  Interlacing signal input is not supported.</p> <p>DVI port:  Max. resolution: 1920 × 1200@60 Hz  Min. resolution: 320 × 180@60 Hz  Supports custom resolution. Total resolution should be no more than 2.6 MP@60 Hz  Max. width: 144 to 4096, alignment: 2 alignment  Max. height: 144 to 4096, alignment: 1 alignment  Supports HDCP 1.4  Interlacing signal input is not supported.</p>
Video Input Processing Feature	Processing depth: 8 bit Sampling format: RGB: 444 YUV: 444 YUV: 422 YUV: 420
<b>Video Output</b>	
Max. Video Output Resolution	13 MP
Loading Capacity for Video Output to LED	Loading per port: 650000 Width: 144 to 8192; alignment: 2 alignment Height: 64 to 8192; alignment: 1 alignment
LED Loading Interfaces	20
LED Loading Interfaces Type	RJ-45
Video Loop Output Interfaces	2
Type of Video Loop Output Interface	1 channel of HDMI 2.0 + 1 channel of DVI

Video Loop Output Resolution	<p>HDMI 2.0 port:  Max. resolution: 4096 × 2160@60 Hz  Min. resolution: 320 × 180@60 Hz  Output resolution maintains consistency with the video input resolution.  Max. width: 144 to 8192, alignment: 2 alignment  Max. height: 144 to 8192, alignment: 1 alignment  Supports HDCP 2.2</p> <p>DVI port:  Max. resolution: 1920 × 1200@60 Hz  Min. resolution: 320 × 180@60 Hz  Output resolution maintains consistency with the video input resolution.  Max. width: 144 to 4096, alignment: 2 alignment  Max. height: 144 to 4096, alignment: 1 alignment  Supports HDCP 1.4</p>
Video Live View Output Interfaces	1
Type of Video Live View Output Interface	HDMI 1.4
Video Live View Output Resolution	720p@60 Hz
<b>Audio Output</b>	
Audio Output Interfaces	1
Audio Output Interface Type	3.5 mm audio output
<b>Wireless</b>	
Remote Control	Supports IR remote control and RF remote control
<b>Front Panel</b>	
Screen	128 × 64, OLED screen
USB Port	1 channel of USB 2.0
Button	+: increase brightness -: decrease brightness Source: change signal source
Indicator	Active: The device is running. Source: The signal source is accessed. Error: The device operation exception occurs.
Power Switch	On: The device is started and running. Off: The device is not powered on or is not started.
<b>Control Interface</b>	
Control Network Port	2 × 10/100/1000 Mbps self-adaptive Ethernet port (RJ-45) Connects to the external network and supports multi-device network cascade management.
IR Input	1 × 3.5 mm connector Supports the access of IR remote control.
Serial Interface	1 × debugging serial port (4-pin connector) + 1 × RS-485 central control serial port (green Phoenix contact) + 1 × RS-485 serial port for light sensor (green Phoenix contact) Baud rate: 115200 Data bit: 8
Power Switch	Button switch


## Typical Application

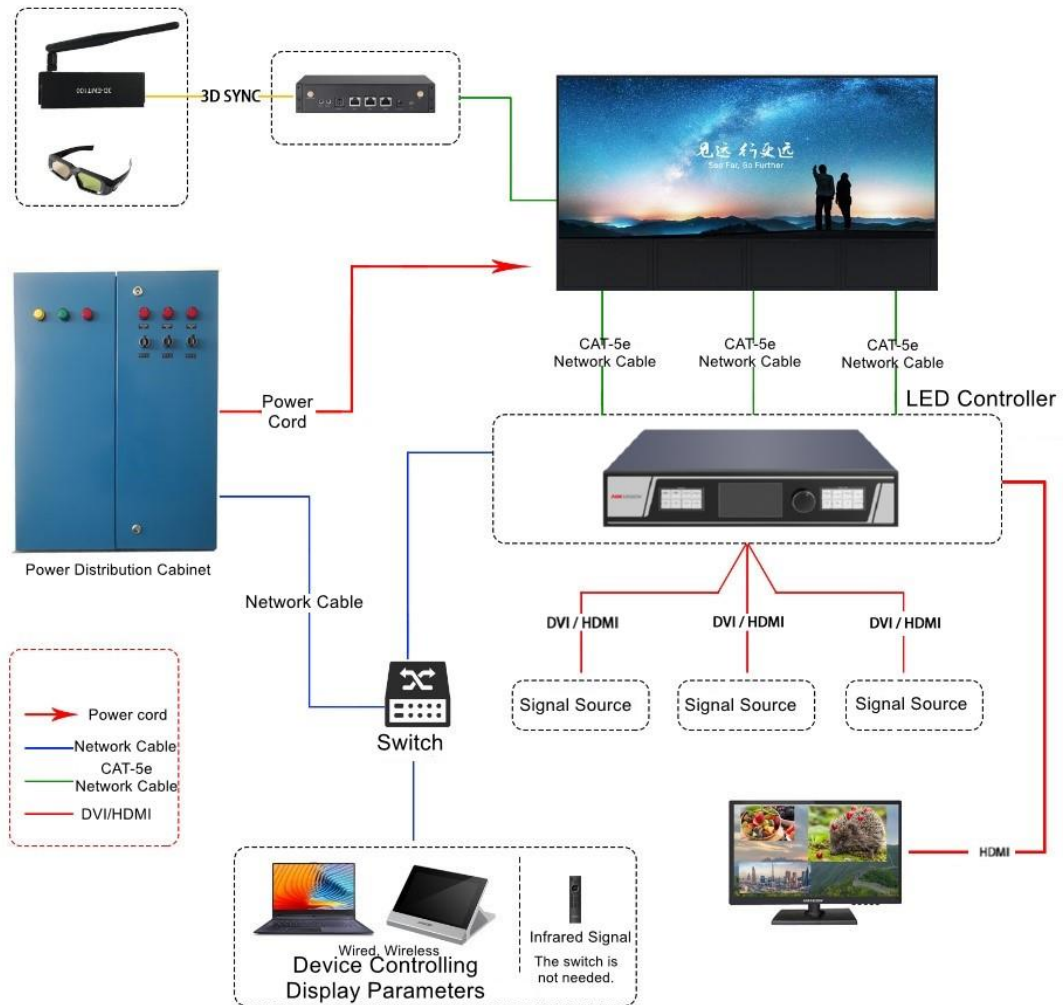

### Available Model

DS-DT60V-03HDI20NO/U

▪ Dimension

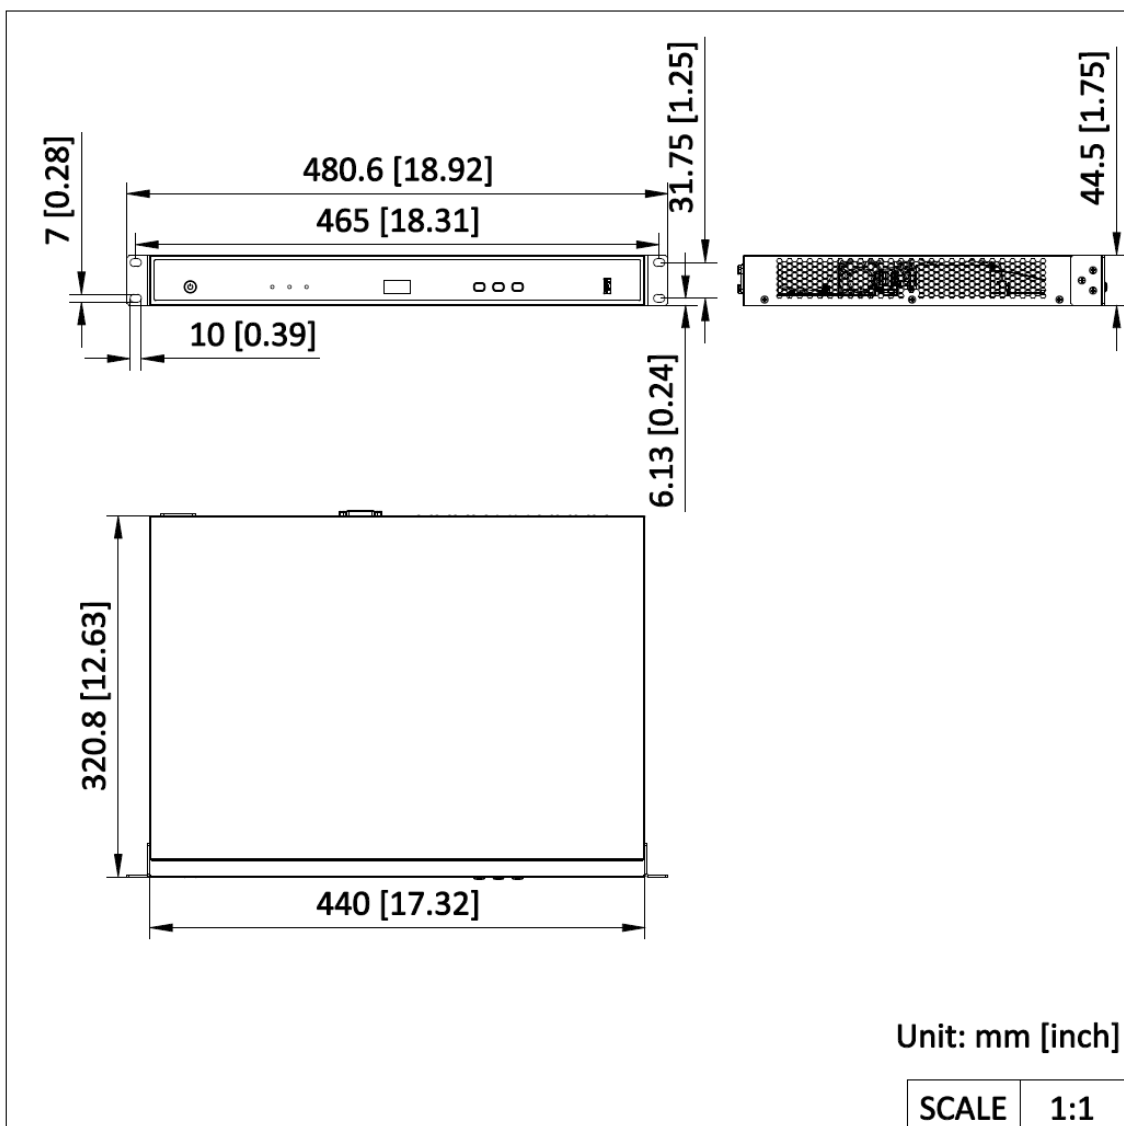

# 见远行更远

See Far, Go Further



online小程序



国内公众号



服务公众号



企业微信

**杭州海康威视数字技术股份有限公司**  
HANGZHOU HIKVISION DIGITAL TECHNOLOGY CO., LTD.

海康威视官网 <https://www.hikvision.com/cn/>  
海康威视合作伙伴平台 <https://partners.hikvision.com/>  
服务热线 400-800-5998 (7\*24小时)

©杭州海康威视数字技术股份有限公司。除非另有约定，我们不对本手册提供任何明示或默示的声明或保证。我们保留修改的权利，恕不另行通知。